
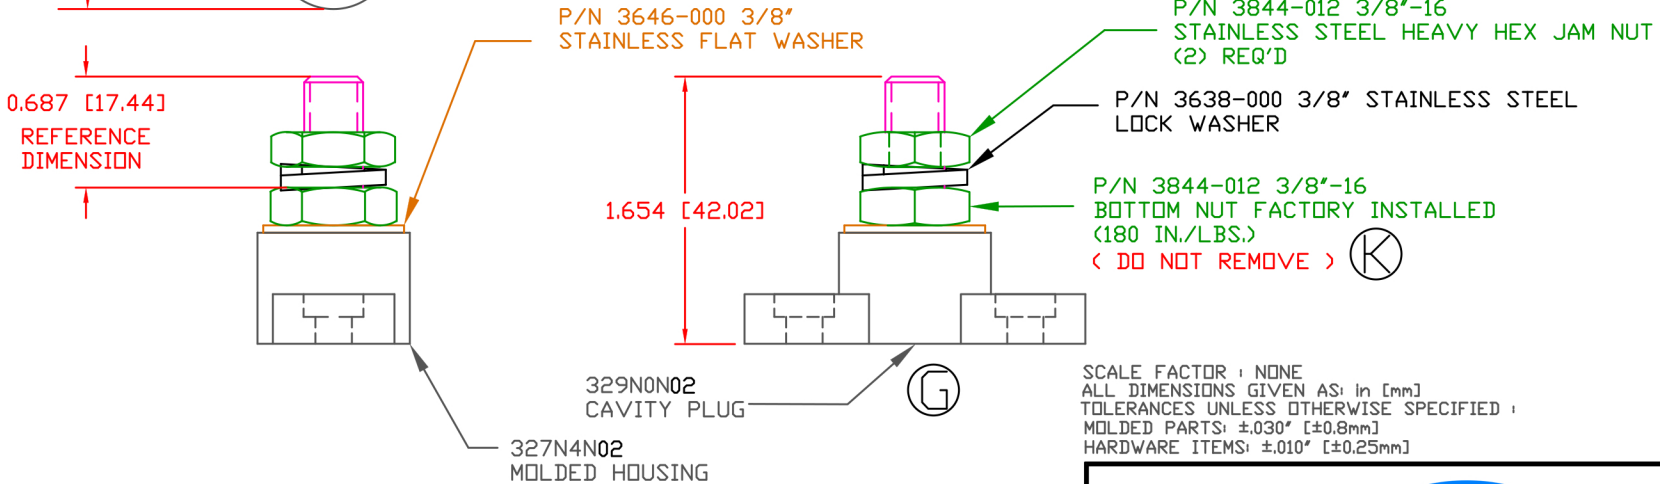


LTR.	REVISIONS	DATE	INT.
A	ADDED MATERIAL AND PERFORMANCE NOTES	1-22-04	BRH
B	REVISED PERFORMANCE NOTES	2-23-04	BRH
C	3844-002 WAS 3844	5-18-05	BRH
D	REPLACED (1)-3844-002 WITH (1)-3844	9-01-05	BRH
E	ADDED OPTIONAL CONSTRUCTION NOTE AND -000 SUFFIXES	4-04-06	BRH
F	REMOVED OPTIONAL CONSTRUCTION NOTE	10-08-15	RAS
G	PN 329NOV** CHANGED TO 329NON**	6-32-16	MDL
H	3844-012 WAS 3844-003	12-01-16	JMM
I	UPDATED AND ADDED DIMENSIONS FOR MOUNTING	7-31-17	RAS
J	REPLACED CURRENT LIMITS WITH TEMPERATURE LIMIT	10-12-18	RAS
K	UPDATED INTERNAL ASSEMBLY TORQUE FROM (144 IN./LBS)	11-12-18	RAS

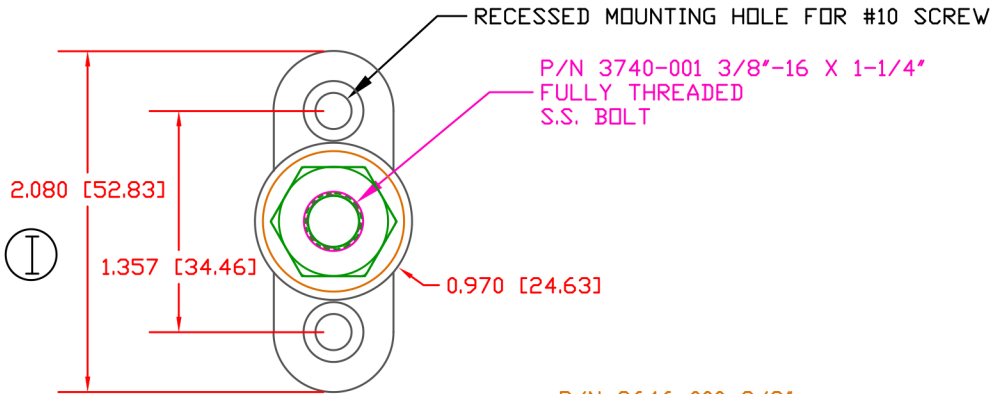

(E) (F) (H)

SCALE FACTOR : NONE
 ALL DIMENSIONS GIVEN AS: in [mm]
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 MOLDED PARTS: ±0.30" [±0.8mm]
 HARDWARE ITEMS: ±0.10" [±0.25mm]

MATERIAL: GLASS FILLED NYLON
 VENDOR PART NO: NYLON N2015 HL NAT
 SPECIFIC GRAVITY: 1.23
 MELTING TEMP: 515 F [268 C]
 U.L. RATING: UL 94 HB

(A) OVERALL ASSEMBLY TEMPERATURE NOT TO EXCEED 140 DEGREES F
 (B) (60 DEGREES C)
 (J)

RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)



REF:	DATE: 4-09-03	DRN BY: BRH	WEIGHT:
TITLE: 3/8" SMALL JUNCTION POST		CHK'D BY: BRH	SCALE: NONE
MATERIAL:		PART NO. 670156	
COLOR: RED	DRG CLASS: REV K		