
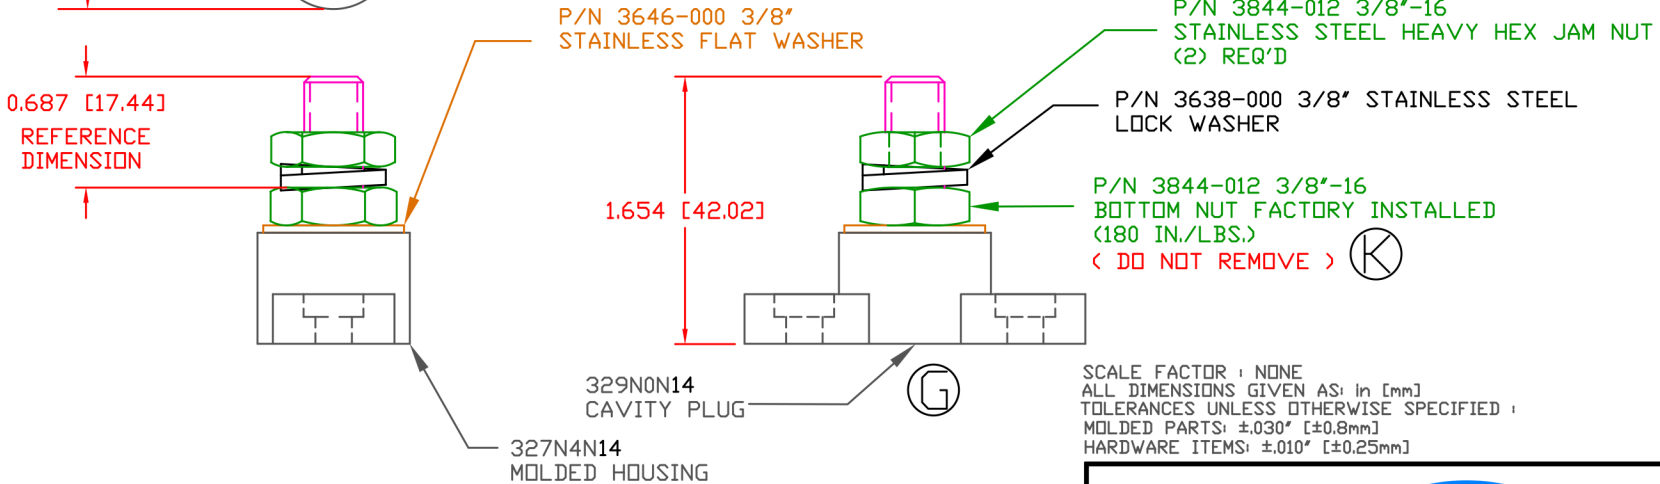


LTR.	REVISIONS	DATE	INT.
A	ADDED MATERIAL AND PERFORMANCE NOTES	1-22-04	BRH
B	REVISED PERFORMANCE NOTES	2-23-04	BRH
C	3844-002 WAS 3844	5-18-05	BRH
D	REPLACED (1)-3844-002 WITH (1)-3844	9-01-05	BRH
E	ADDED OPTIONAL CONSTRUCTION NOTE AND -000 SUFFIXES	4-04-06	BRH
F	REMOVED OPTIONAL CONSTRUCTION NOTE	10-08-15	RAS
G	PN 329NDV** CHANGED TO 329NON**	6-32-16	MDL
H	3844-012 WAS 3844-003	12-01-16	JMM
I	UPDATED AND ADDED DIMENSIONS FOR MOUNTING	7-31-17	RAS
J	REPLACED CURRENT LIMITS WITH TEMPERATURE LIMIT	10-12-18	RAS
K	UPDATED INTERNAL ASSEMBLY TORQUE FROM (144 IN./LBS.)	11-12-18	RAS

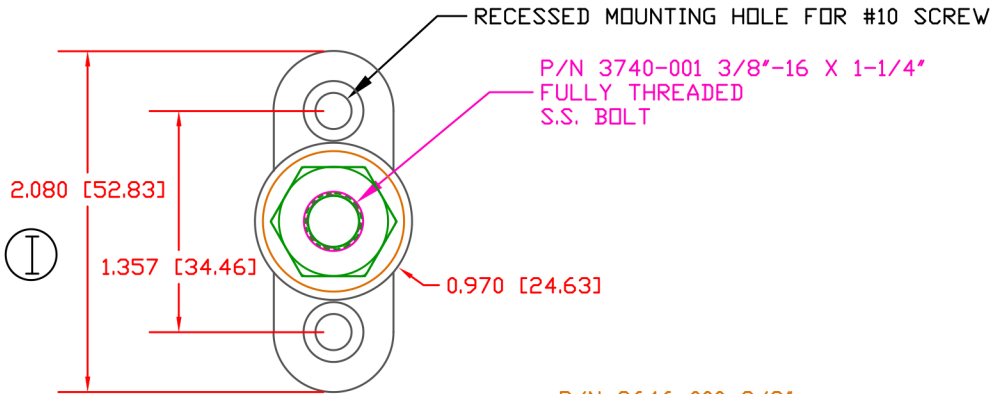

SCALE FACTOR : NONE  
 ALL DIMENSIONS GIVEN AS: in [mm]  
 TOLERANCES UNLESS OTHERWISE SPECIFIED :  
 MOLDED PARTS: ±0.30" [±0.8mm]  
 HARDWARE ITEMS: ±0.10" [±0.25mm]

MATERIAL: GLASS FILLED NYLON  
 VENDOR PART NO: NYLON N2015 HL BK  
 SPECIFIC GRAVITY: 1.23  
 MELTING TEMP: 515 F [268 C]  
 U.L. RATING: UL 94 HB

OVERALL ASSEMBLY TEMPERATURE NOT TO EXCEED 140 DEGREES F  
 ( 60 DEGREES C )

RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)



REF:	DATE: 4-09-03	DRN BY: BRH	WEIGHT:
		CHK'D BY: BRH	
TITLE: 3/8" SMALL JUNCTION POST			SCALE: NONE
MATERIAL:		PART NO.	
COLOR: BLACK	DRG CLASS: REV K	670157	