

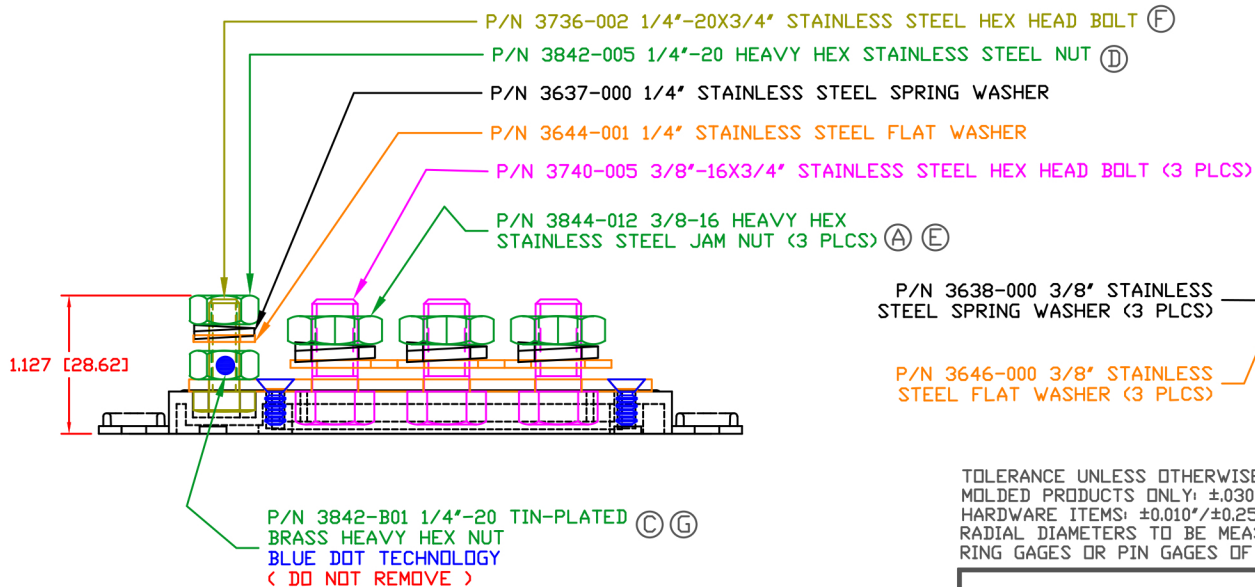


LTR.	REVISIONS	DATE	INT.
A	3844-003 WAS 3844	06-16-06	BRH
B	3874-000 WAS 3873-000	07-12-06	BRH
C	3842-001 WAS 3842-002	08-14-06	BRH
D	REPLACED P/N 3842-002 WITH P/N 3842-005	03-28-06	RAS
E	3844-012 WAS 3844-003	11-01-16	JMM
F	REPLACED P/N 3736-005 WITH 3736-002	2-14-17	RAS
G	3842-B01 WAS 3842-001	06-14-17	JMM

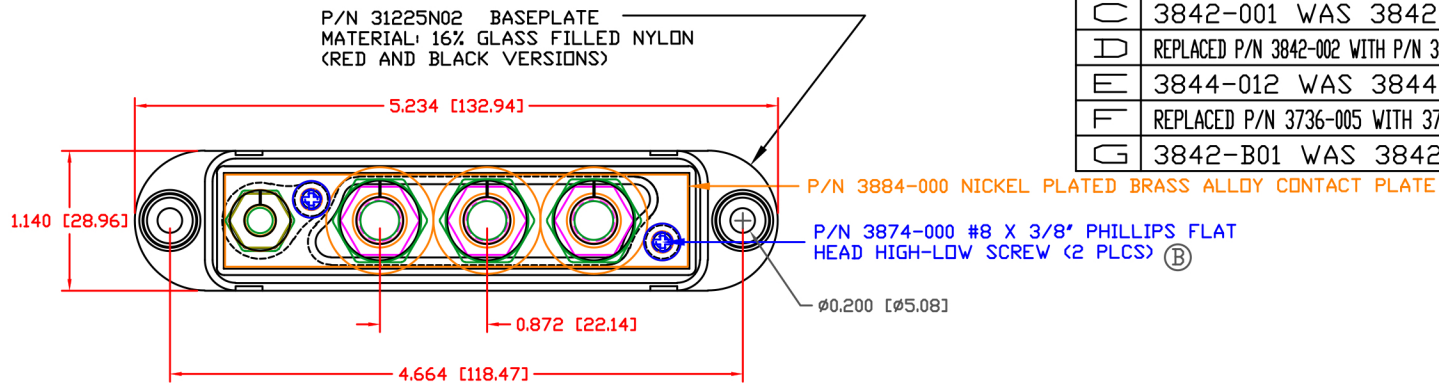

P/N 3638-000 3/8" STAINLESS STEEL SPRING WASHER (3 PLCS)

P/N 3646-000 3/8" STAINLESS STEEL FLAT WASHER (3 PLCS)



TOLERANCE UNLESS OTHERWISE SPECIFIED:
 MOLDED PRODUCTS ONLY: ±0.30"/±0.8mm
 HARDWARE ITEMS: ±0.010"/±0.25mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

MATERIAL:
 VENDOR PART NO:
 SPECIFIC GRAVITY:
 MELTING TEMP:
 U.L. RATING:

GLASS FILLED NYLON
 NYLON N2015 HL NAT
 1.23
 515 F [268 C]
 UL 94 HB

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER
 MAXIMUM AMPERAGE: 210 AMPS @12VDC
 RECOMMENDED MAX FASTENER TORQUE: 3/8"-16 - 180 IN./LBS.
 1/4"-20 - 60 IN./LBS.

(ANTI-SEIZE RECOMMENDED)



REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	01-20-06	CHK'D BY:	BRH	
TITLE:			3/8" 4- POINT CONTACT PLATE	
SCALE:				
MATERIAL:			PART NO.	
COLOR:	RED	DRG CLASS	REV G	670164